

# SLA5073

N-channel  
5-phase motor drive

External dimensions A ··· SLA (15-pin)

## Absolute maximum ratings

(Ta=25°C)


Symbol	Ratings	Unit
V <sub>DSS</sub>	60	V
V <sub>GSS</sub>	±20	V
I <sub>D</sub>	5	A
I <sub>D(pulse)</sub>	8 (PW≤1ms, Du≤25%)	A
P <sub>T</sub>	5 (Ta=25°C, with all circuits operating, without heatsink) 30 (Tc=25°C, with all circuits operating, with infinite heatsink)	W
θ <sub>j-a</sub>	25 (Junction-Air, Ta=25°C, with all circuits operating)	°C/W
θ <sub>j-c</sub>	4.17 (Junction-Case, Tc=25°C, with all circuits operating)	°C/W
V <sub>ISO</sub>	1000 (Between fin and lead pin, AC)	Vrms
T <sub>ch</sub>	150	°C
T <sub>stg</sub>	-40 to +150	°C

## Electrical characteristics

(Ta=25°C)


Symbol	Specification			Unit	Conditions
	min	typ	max		
V <sub>(BR)DSS</sub>	60			V	I <sub>D</sub> =100μA, V <sub>GS</sub> =0V
I <sub>GS</sub>			±100	nA	V <sub>GS</sub> =±20V
I <sub>SS</sub>			100	μA	V <sub>DS</sub> =60V, V <sub>GS</sub> =0V
V <sub>TH</sub>	1.0		2.0	V	V <sub>DS</sub> =10V, I <sub>D</sub> =250μA
R <sub>e(yfs)</sub>		5.5		S	V <sub>DS</sub> =10V, I <sub>D</sub> =3A
R <sub>DS(ON)</sub>		0.3		Ω	V <sub>GS</sub> =4V, I <sub>D</sub> =3A
C <sub>iss</sub>	320			pF	V <sub>DS</sub> =10V, f=1.0MHz, V <sub>GS</sub> =0V
C <sub>oss</sub>	160			pF	
C <sub>rss</sub>	35			pF	
t <sub>d(on)</sub>	16			ns	I <sub>D</sub> =3A, V <sub>DD</sub> =20V,
t <sub>r</sub>	65			ns	R <sub>L</sub> =6.67Ω, V <sub>GS</sub> =5V, see Fig. 3 on page 16.
t <sub>d(off)</sub>	70			ns	
t <sub>f</sub>	45			ns	
V <sub>SD</sub>	1.2			V	I <sub>SD</sub> =4A, V <sub>GS</sub> =0V
t <sub>rr</sub>	65			ns	I <sub>SD</sub> =3A, V <sub>GS</sub> =0V, di/dt=100A/μs

## ■ Equivalent circuit diagram

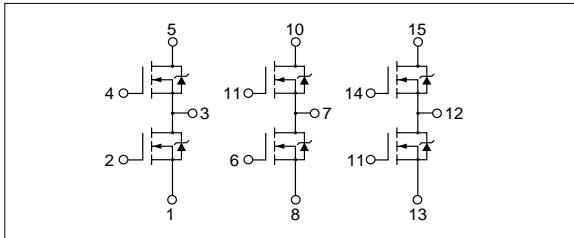


## Characteristic curves


### I<sub>D</sub>-V<sub>DS</sub> Characteristics (Typical)

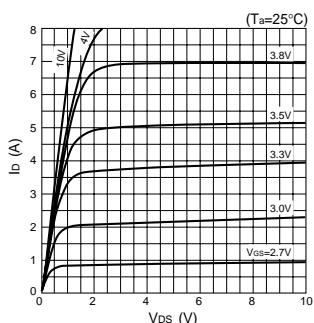


### I<sub>D</sub>-V<sub>GS</sub> Characteristics (Typical)

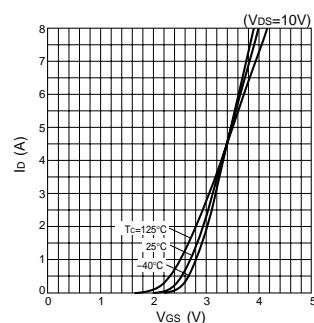


### R<sub>DS(ON)</sub>-Id Characteristics (Typical)

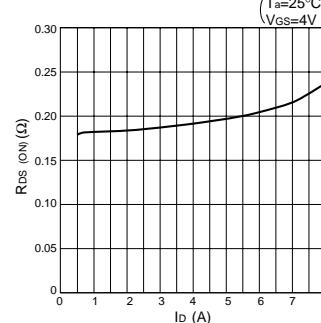


### R<sub>e(yfs)</sub>-Id Characteristics (Typical)

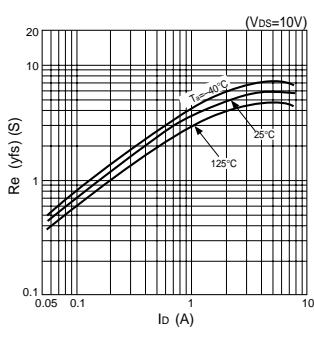


### R<sub>DS(ON)</sub>-T<sub>c</sub> Characteristics (Typical)

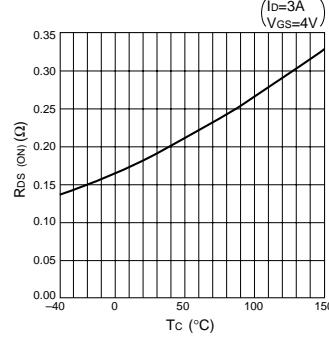


### Capacitance-V<sub>DS</sub> Characteristics (Typical)

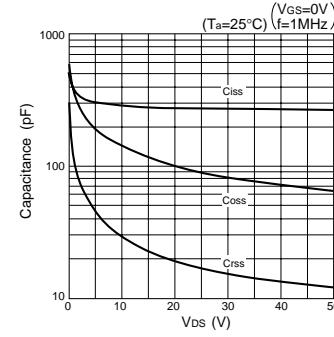

### I<sub>DR</sub>-V<sub>SD</sub> Characteristics (Typical)

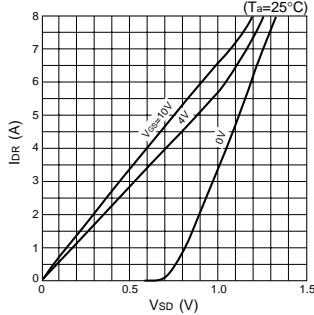

### Safe Operating Area (SOA)

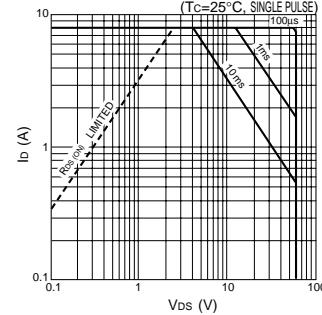

### P<sub>T</sub>-T<sub>a</sub> Characteristics

