

ALPS Potentiometers

ALPS

ALPS 9MM SNAP-IN INSULATED SHAFT POTENTIOMETERS

DIMENSIONS: mm






Features:

- Thanks to its structure eliminating openings, the dust proofing capacity and flux resistance have been improved
- 9.8mm outline size is ideal for high-density set design.

Applications:

Suitable for various control applications with audio products, visual products, electronic musical instruments.

Cross Reference	
ALPS RK09	Panasonic EVU

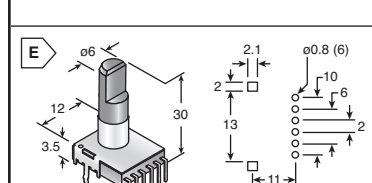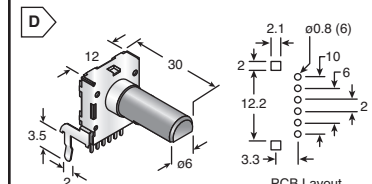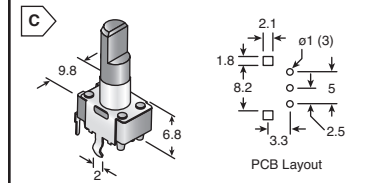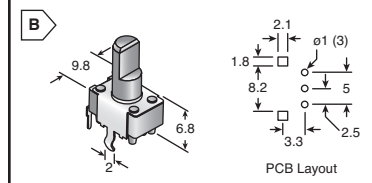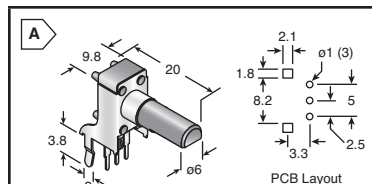

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	Alps Part No.	Value Ohm	Fig.	Taper	Detent	Bushing	Mount	Price Each				
								1	25	100	500	1000
688-RK09D1110C0R	RK09D1110C0R	50K	A	Linear	W/O	Metal	Horizontal	50.66	41.07	32.17	19.17	13.69
688-RK09D1130009	RK09D1130009	10K	B	Linear	Center	W/O	Vertical	50.66	41.07	32.17	19.17	13.69
688-RK09D113000D	RK09D113000D	50K	C	Linear	Center	Metal	Vertical	52.03	41.76	32.86	19.85	14.03
688-RK09D113000F	RK09D113000F	10K	C	Linear	Center	Metal	Vertical	52.03	41.76	32.86	19.85	14.03
688-RK09D113000K	RK09D113000K	50K	B	Linear	Center	W/O	Vertical	50.66	41.07	32.17	19.17	13.69
688-RK09D1130A1N	RK09D1130A1N	10K	C	Linear	W/O	Metal	Vertical	50.66	41.07	32.17	19.17	13.69

ALPS 12MM SNAP-IN INSULATED SHAFT POTENTIOMETERS

Cross Reference	
ALPS RK12	Panasonic EVJ

- Enhanced structural design has improved cross talk and gang error characteristics.
- R-shaped shaft end point prevents catching when inserting the knob.
- Solder bridges can hardly appear thanks to terminal configuration.

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	Alps Part No.	Value Ohm	Fig.	Taper	Detent	Bushing	Mount	Price Each				
								1	25	100	500	1000
688-RK12L1210C0H	RK12L1210C0H	10K	D	Audio	W/O	Metal	Horizontal	72.91	64.01	52.37	32.17	22.25
688-RK12L1210C0K	RK12L1210C0K	20K	D	Audio	W/O	Metal	Horizontal	72.91	64.01	52.37	32.17	22.25
688-RK12L1210C0L	RK12L1210C0L	50K	D	Audio	W/O	Metal	Horizontal	72.91	64.01	52.37	32.17	22.25
688-RK12L1210C1K	RK12L1210C1K	10K	D	Linear	Center	Metal	Horizontal	79.75	70.17	57.50	35.25	24.30
688-RK12L1210C1M	RK12L1210C1M	20K	D	Linear	Center	Metal	Horizontal	79.75	70.17	57.50	35.25	24.30
688-RK12L1210C1N	RK12L1210C1N	50K	D	Linear	Center	Metal	Horizontal	79.75	70.17	57.50	35.25	24.30
688-RK12L1230007	RK12L1230007	20K	E	Fader	Center	W/O	Vertical	86.60	76.33	62.29	38.34	26.36
688-RK12L123000E	RK12L123000E	50K	E	Linear	Center	W/O	Vertical	86.60	76.33	62.29	38.34	26.36
688-RK12L123000G	RK12L123000G	10K	E	Linear	Center	W/O	Vertical	86.60	76.33	62.29	38.34	26.36
688-RK12L1230C03	RK12L1230C03	10K	E	Fader	Center	W/O	Vertical	86.60	76.33	62.29	38.34	26.36
688-RK12L1230C1T	RK12L1230C1T	20K	E	Linear	Center	W/O	Vertical	86.60	76.33	62.29	38.34	26.36
688-RK12L1230C36	RK12L1230C36	5K	E	Linear	Center	W/O	Vertical	86.60	76.33	62.29	38.34	26.36
688-RK12L12C0A0A	RK12L12C0A0A	20K	E	Audio	W/O	W/O	Vertical	92.42	82.83	58.53	34.91	24.92
688-RK12L12C0A0G	RK12L12C0A0G	10K	E	Audio	W/O	W/O	Vertical	83.86	75.30	53.05	31.83	22.59
688-RK12L12C0A0H	RK12L12C0A0H	50K	E	Audio	W/O	W/O	Vertical	83.86	75.30	53.05	31.83	22.59
688-RK12L12C0C0P	RK12L12C0C0P	5K	E	Audio	W/O	W/O	Vertical	83.86	75.30	53.05	31.83	22.59

DIMENSIONS: mm

- Solderable with auto dipping.
- Available with a wide variety of detents.

- Suitable for Master volume control in high-grade audio equipment, fader for studio mixers, etc.

- Excellent operational feel by less lever wobble.
- Allows the maximum attenuation of 110dB.

- Soft, comfortable feel and improved operability.
- Allows maximum attenuation of 110dB.

ALPS SLIDE OPERATION POTENTIOMETERS

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	Alps Part No.	Panasonic Cross Reference	Value Ohm	Fig.	Taper	Dimensions mm				Travel (mm)	Unit	Style	Price Each				
						A	B	C	D				1	25	50	100	200
688-RS45111A6A08	RS45111A6A08	EWA-P12C15B14	10K	A	Linear	56	60	15	8	45	Single	Std	94.13	77.01	64.01	56.48	51.68
688-RS45112A6A05	RS45112A6A05	EWA-P30C15A14	10K	A	Linear	56	60	15	8	45	Dual	Std	119.80	95.84	78.72	71.88	60.93
688-RS45112A600J	RS45112A600J	- - - - -	10K	A	Audio	56	60	15	8	45	Dual	Std	119.80	95.84	78.72	71.88	60.93
688-RS6012A600N	RS6012A600N	EWA-Q30C15A14	10K	A	Audio	71	75	15	9	60	Dual	Std	136.91	109.53	90.70	82.15	77.36
688-RS6012A600U	RS6012A600U	- - - - -	20K	A	Audio	71	75	15	9	60	Dual	Std	136.91	109.53	90.70	82.15	77.36
688-RS6011YA6009	RS6011YA6009	EWA-Q12C15B14	10K	A	Linear	71	75	15	9	60	Single	Std	112.95	90.70	75.30	68.46	60.24
688-RSA0K11A9005	RSA0K11A9005	- - - - -	10K	B	10% Audio	120	128	8.2	4	100	Single	Rail	1266.44	1163.75	1061.07	992.61	855.70
688-RSA0K12A9001	RSA0K12A9001	EVJ-JYBP08	10K	B	10% Audio	120	132.6	8.2	13.9	100	Dual	Rail	1266.44	1163.75	1061.07	992.61	855.70
688-RSA0N119A02	RSA0N119A02	EVA-JQLR15B14	10K	C	Linear	120	128	8.2	16	100	Single	Thin	290.94	232.75	191.68	174.56	171.14
688-RS60N1219A04	RS60N1219A04	EVJ-NADR15A14	10K	C	Audio	80	88	8.2	16	60	Dual	Thin	273.82	213.93	181.41	164.29	162.58
688-RSA0N11S9005	RSA0N11S9005	EVA-NF4R15A14	10K	D	Audio	120	132.6	8.2	13.9	100	Single	Mono	273.82	213.93	181.41	164.29	162.58
688-RSA0N11S9A08	RSA0N11S9A08	EVA-NF4R15D14	10K	D	10% Audio	120	128	8.25	8.4	100	Single	Mono	273.82	213.93	181.41	164.29	162.58
688-RS60N11S6A04	RS60N11S6A04	EVA-NE3R15B14	10K	D	Linear	80	88	14	4	60	Single	Mono	273.82	213.93	181.41	164.29	162.58
688-RSA0N11M9A05	RSA0N11M9A05	- - - - -	10K	E	Linear	120	146.5	802	17	100	Single	Motor	716.39	644.86	572.98	544.23	515.82

Potentiometers

Alps