



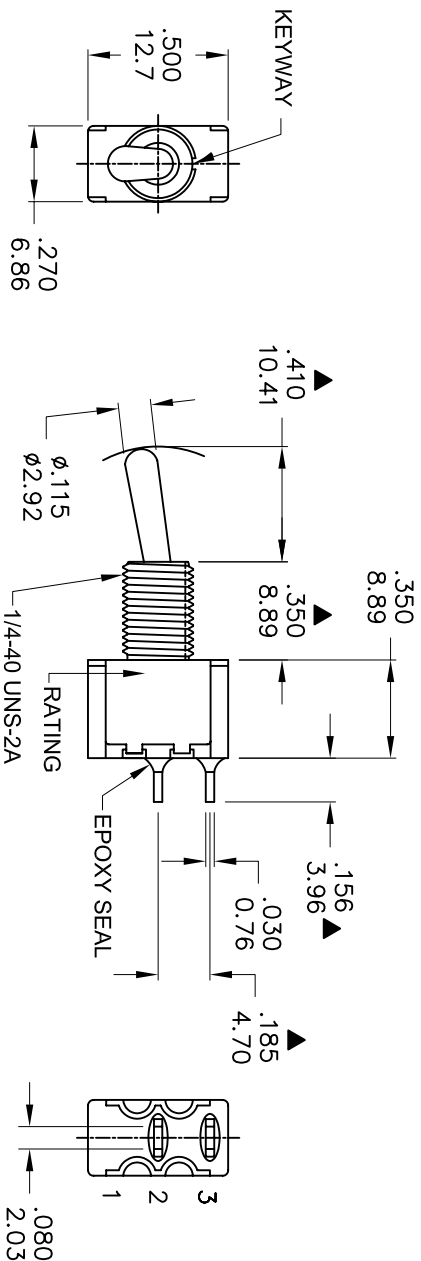

Model No.	POS.1	POS.2	POS.3
1MS9	ON	NONE	OFF
Term. Comm.	2-3		
SCHEMATIC			OPEN

SWITCH FUNCTION

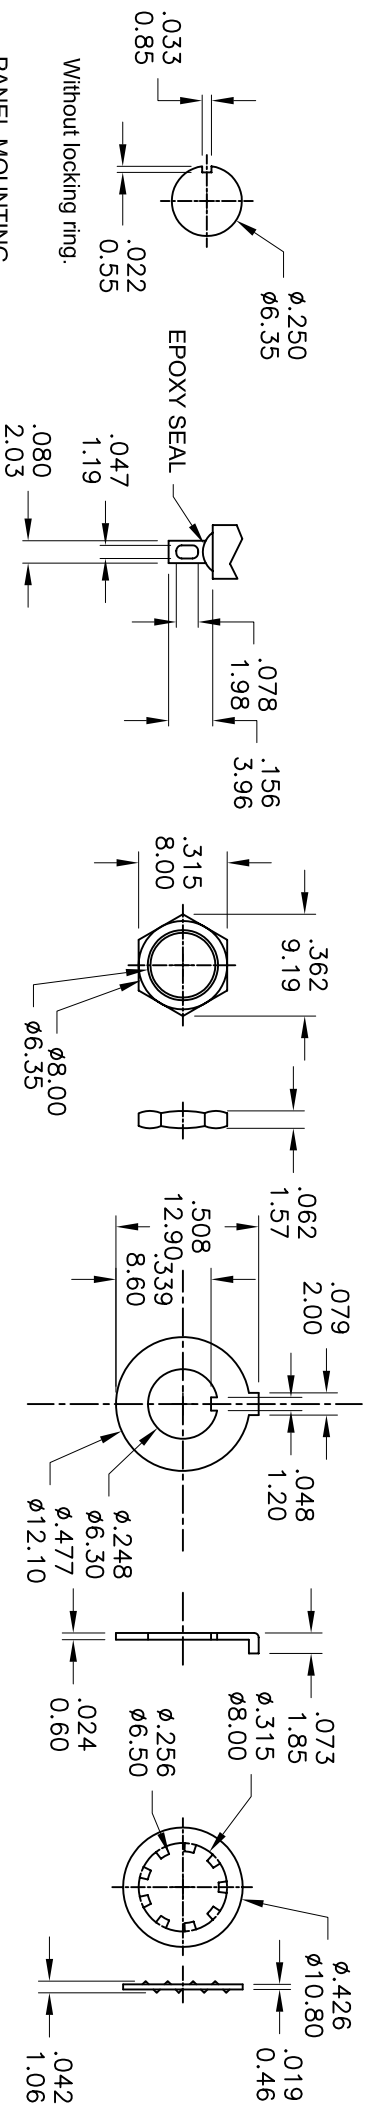

PANEL MOUNTING

SOLDER LUG

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.
CONTACT RESISTANCE: 10mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE: Dially phthalate (DAP) (UL94V-0).
ACTUATOR: Brass,chrome plated.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Silver or gold plated.
RoHS:2002/95/EC

原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2			TITLE 圖名			Miniature Toggle Switches			SIZE 圖紙	A4			
符號			TOLERANCE (公差) : 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5° FILE NAME : 1MSP1214			DWG NO.			5196			UNIT	inch			
1	Ⓐ	圖面修改底座更新				REV.			DATE			AUG - 15 - 2007			SHEET	1 of 1
2	Ⓑ					圖號			B			日期			張數	
3	Ⓒ					版本			RICHARD			DRAWN BY				
4	Ⓓ					CHECKED BY			審核			FION				
5	Ⓔ															

大 廣 有 限 公 司 DA KOANG CO., LTD.

CONTACT MATERIAL		TERMINATION RATING	RATINGS
Q	Silver	Q = Silver	5 Amps @120 VAC or 28 VDC 2 Amp @250VAC
S		S = Silver pure-tin	
C	Gold over Silver	C = Gold over silver	
K		K = Gold over silver pure-tin	
R		R = Gold	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)
G	Gold	G = Gold pure-tin	