



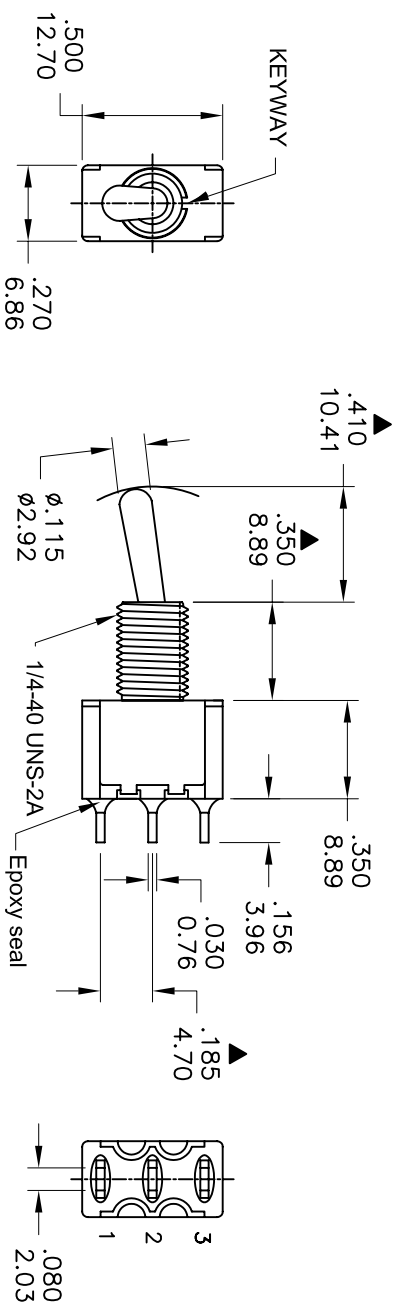

Model No.	POS.1	POS.2	POS.3
1MS1	ON 	NONE 	ON 
Term. Comm.	2-3	OPEN	2-1 
SCHEMATIC			
			

SWITCH FUNCTION

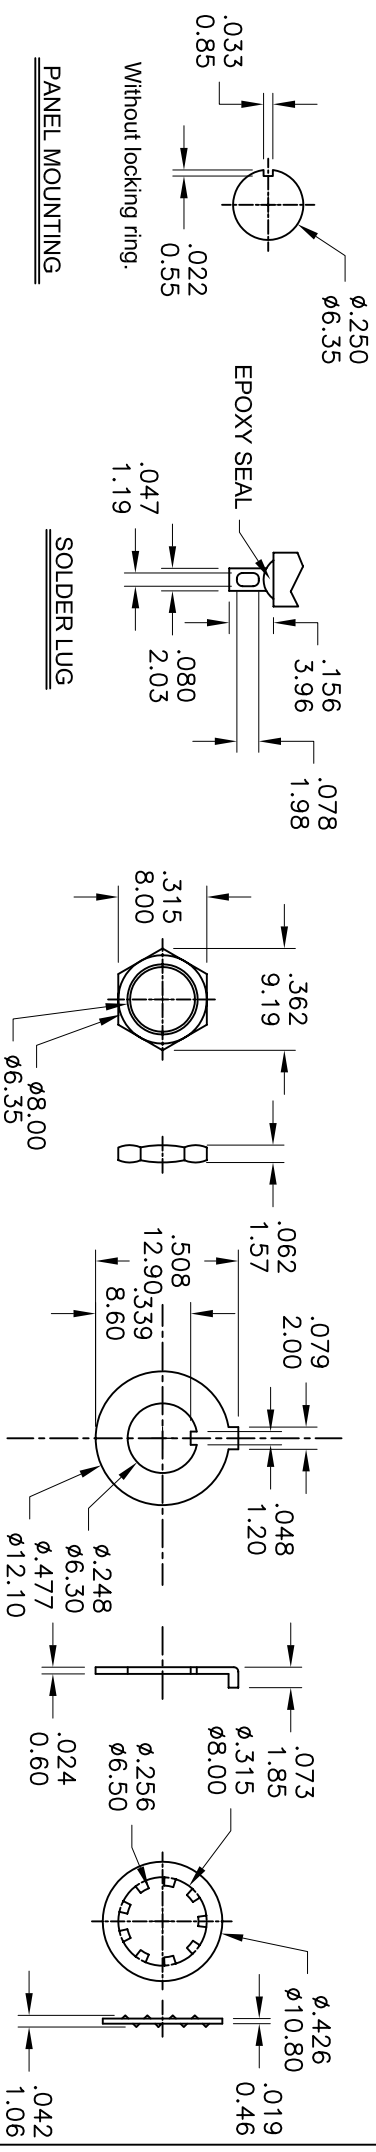

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.
CONTACT RESISTANCE: 10mΩ max. initial @ 2.4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94V-0).
ACTUATOR: Brass, chrome plated.
BUSHING: Brass, nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Silver or gold plated.

RATING:

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
Q : 2Amps @250VAC
5Amps @120 VAC or 28 VDC

大廣有限公司 DA KOANG CO., LTD.

		符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2			TITLE 圖名	Miniature Toggle Switches			SIZE 圖紙	A4
1	Ⓐ					TOLERANCE (公差) : 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5° FILE NAME : 1MSP0694			DWG NO. 圖號	5197	DATE 日期	JAN - 17 - 2006	SHEET 張數	1 of 1
2	Ⓑ													
3	Ⓒ													
4	Ⓓ													
5	Ⓔ													
						CHECKED BY 審核			RICHARD		DRAWN BY 製圖		BLUE	