



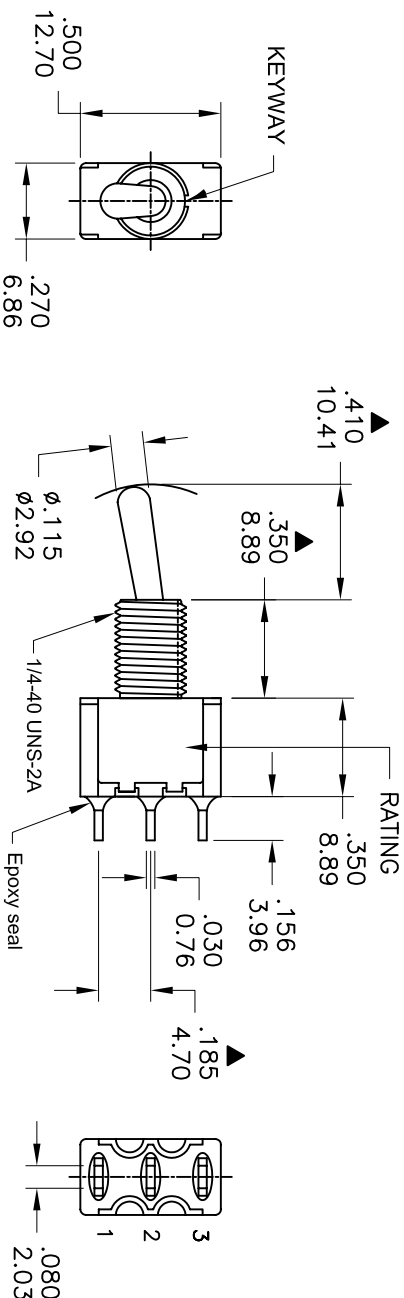

Model No.	POS.1	POS.2	POS.3
1MS3	ON	OFF	ON
Term. Comm.	2-3	OPEN	
SCHEMATIC			

SWITCH FUNCTION

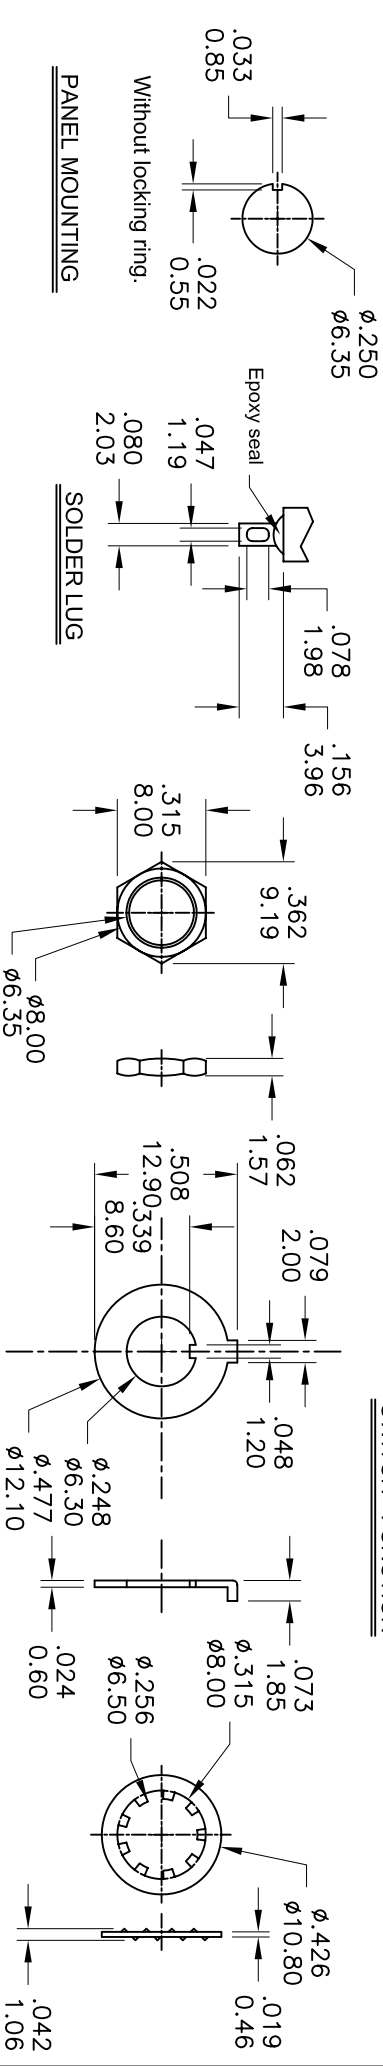

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.
CONTACT RESISTANCE: 10mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).
ACTUATOR: Brass,chrome plated.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT:Silver or gold plated.

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
Q : 2Amps @250VAC
5Amps @120 VAC or 28 VDC

大 廣 有 限 公 司 DA KOANG CO., LTD.

符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2				TITLE	Miniature Toggle Switches			SIZE
1	(A)			TOLERANCE (公差) :				圖名	圖紙			A4
2	(B)			0.00 mm ± 0.25mm				DWG NO.	5197A			UNIT
3	(C)			0.0 mm ± 0.40mm				REV.	A			單位
4	(D)			ANGULAR : ± 5°				CHECKED BY	RICHARD			SHEET
5	(E)			FILE NAME : 1MSP1019				審核	製圖			張數
								DATE	OCT - 26 - 2006			1 of 1
								DRAWN BY	BLUE			