

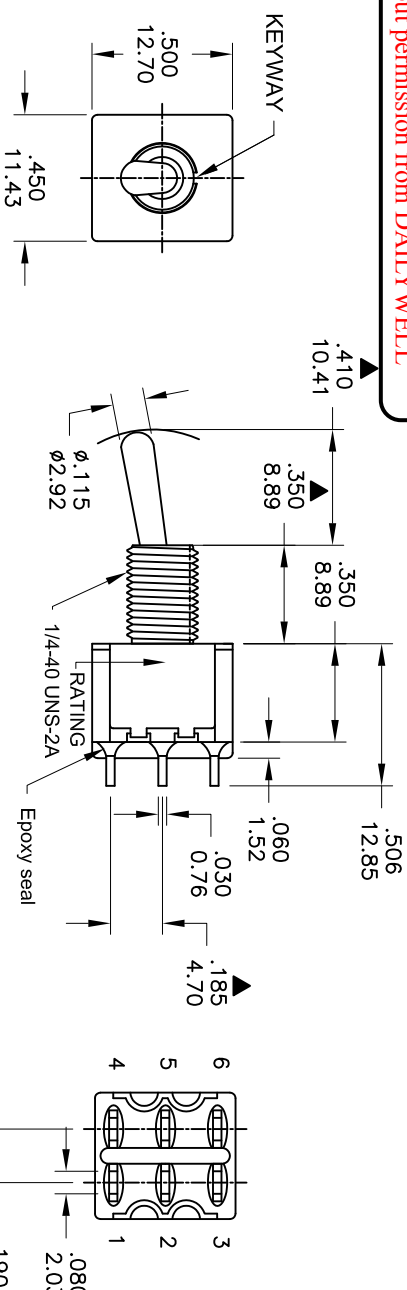



DAILYWELL copyright, may not be used without permission from DAILYWELL



Model No.	POS.1	POS.2	POS.3
			
1MD1	ON	NONE	ON
Term. Comm.	2-3,5-6		2-1,5-4
SCHEMATIC			
			

SWITCH FUNCTION

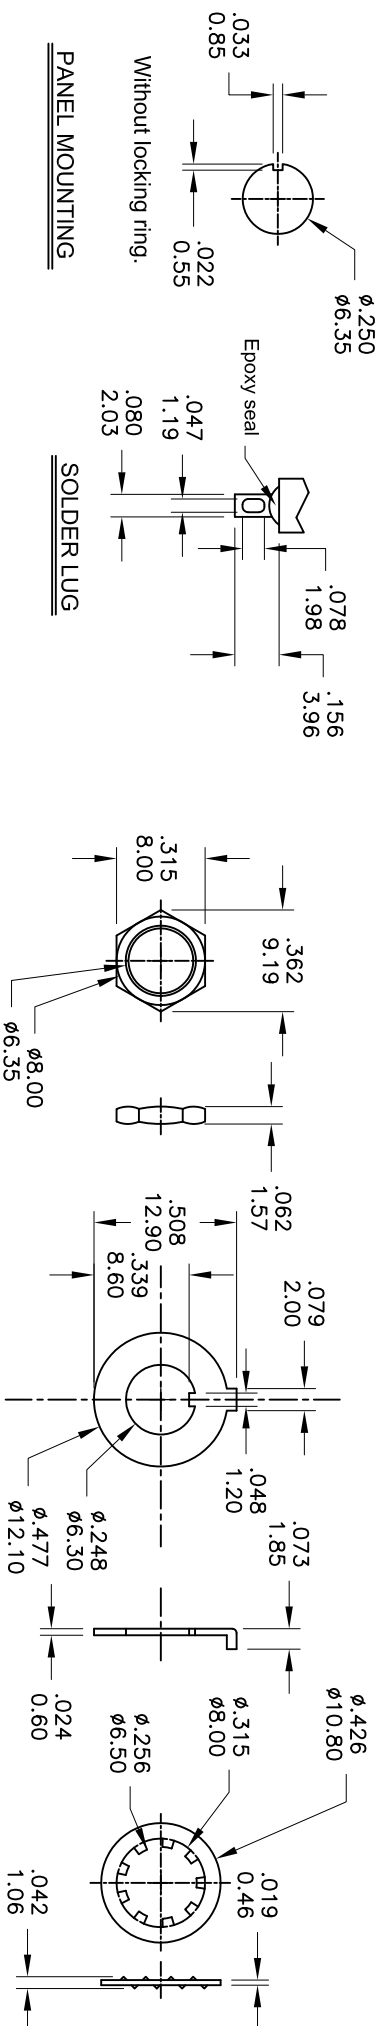

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.
CONTACT RESISTANCE: 10mΩ max. Initial @ 24VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94V-0).
ACTUATOR: Brass, chrome plated.
BUSHING: Brass, nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Silver or gold plated.

RATING:

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
Q : 2Amps @250VAC
5Amps @120 VAC or 28 VDC

大廣有限公司 DA KOANG CO., LTD.

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2				
1	Ⓐ				TOLERANCE (公差) : 0.00 mm ± 0.25mm				
2	Ⓑ				0.0 mm ± 0.40mm				
3	Ⓒ				ANGULAR : ±5°				
4	Ⓓ				FILE NAME : 1MDP0548				
5	Ⓔ								
TITLE 圖名		Miniature Toggle Switches			SIZE 圖紙		A4		
DWG NO. 圖號		5198			UNIT 單位		inch mm		
REV. 版本		DATE 日期		JUL - 20 - 2006		SHEET 張數		1 of 1	
CHECKED BY 審核		RICHARD		DRAWN BY 製圖		ODA			