



CONTACT CONFIGURATION

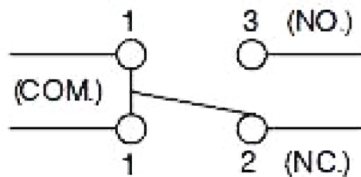

P.C.B. MOUNTING HOLE DIMENSIONS

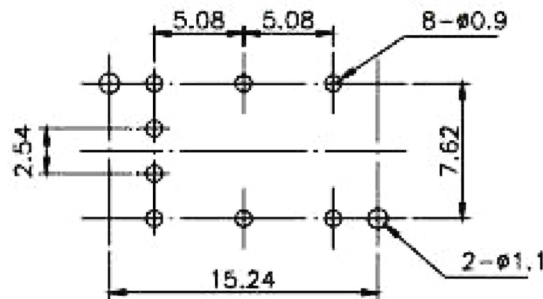

SERIES	Contact arrangement	initial performance					Durability		
		Travel	Operating force	Rating	Contact resistance	Bounce	Operating life	Contact resistance	Bounce
DPS	S.P.D.T.	1.5 ± 0.3mm	150 ± 50gf	30mA 12VDC	50m Ω	30m sec Max	5 × 10 ⁵ Max	100m Ω	50m sec Max

DATE DWN CHKD APVD MANAGER

12.08.2005

PART NAME: DIP PUSH BUTTON SWITCH W/LED

VERSION:2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE: