



CONTACT CONFIGURATION

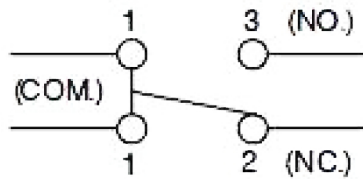

P.C.B. MOUNTING HOLE DIMENSIONS

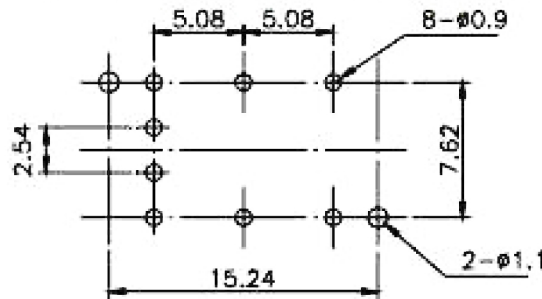

SERIES	Contact arrangement	initial performance				Durability			
		Travel	Operating force	Rating	Contact resistance	Bounce	Operating life	Contact resistance	Bounce
DPS	S.P.D.T.	1.5 ± 0.3mm	150 ± 50gf	30mA 12VDC	50m Ω	30m sec Max	5x10 ⁵ Max	100m Ω	50m sec Max

大廣有限公司 DA KOANG CO., LTD.

DATE DWN CHKD APVD MANAGER

12.08.2005

PART NAME: DIP PUSH BUTTON SWITCH W/LED

PART NUMBER: 5042A

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE: