
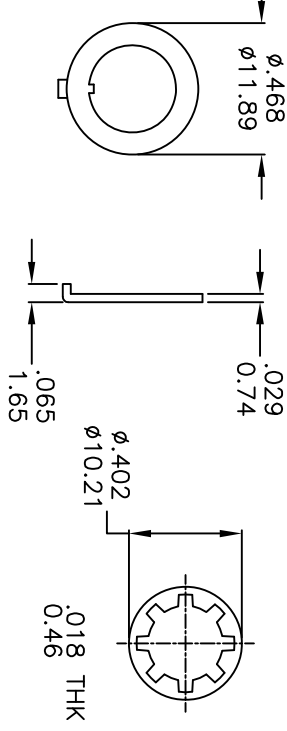
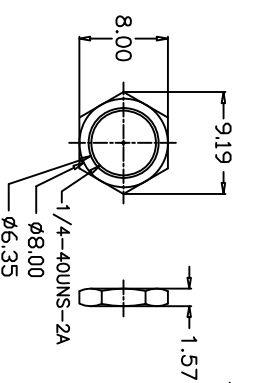
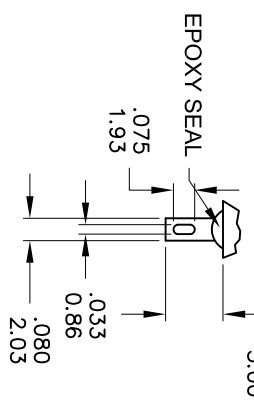


Model No.	POS.1	POS.2
ZMS7		
Term. Comm.	ON	MOM
SCHEMATIC	1-3 	1-2 

**SWITCH FUNCTION**

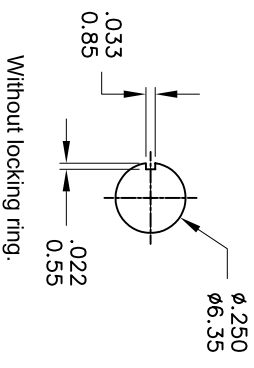

**PANEL MOUNTING**

**SOLDER LUG**

Without locking ring.

**SPECIFICATIONS**

**MECHANICAL LIFE:** 50,000 make-and-break cycles.  
**CONTACT RESISTANCE:** 20mΩ max. initial @ 2-4VDC  
 100mA for both silver and gold plated contacts.  
**INSULATION RESISTANCE:** 1,000MΩ min.  
**DIELECTRIC STRENGTH:** 1,000 V RMS@sea level.  
**OPERATING TEMPERATURE:** -30°C to 85°C.

**MATERIALS**

**CASE:** Dialy phthalate (DAP) (UL94V-0).  
**PLUNGER:** Glass filled Nylon or Glass fill polyester.  
**BUSHING:** Brass, nickel plated.  
**HOUSING:** Stainless Steel.  
**TERMINAL/CONTACT:** Silver or gold plated.  
 RoHS:2002/95/EC

CONTACT MATERIAL	TERMINAL PLATING	RATINGS
Q Silver	Q = Silver	3 Amps @120 VAC or 28 VDC 1 Amps @250VAC 0.4 Volt-Amps(VA) max. @20V max. (AC or DC)
S	S = Silver,pure-tin	
C	C = Gold over silver	
K	K = Gold over silver,pure-tin	
R	R = Gold	
G	G = Gold,pure-tin	

符號	原尺寸	修改後尺寸	變更日期
1	(A)		
2	(B)		
3	(C)		
4	(D)		
5	(E)		

**SCALE (比例): 3:2**

**TOLERANCE (公差):**  
 0.00 mm ± 0.25mm  
 0.0 mm ± 0.40mm  
 ANGULAR : ± 5°  
 FILE NAME : 7MSP0509

<b>大廣有限公司 DA KOANG CO., LTD.</b>		<b>TITLE</b>		<b>圖名</b>		<b>SIZE</b>	
		Snap-Acting Pushbutton Switches		圖紙		A4	
		DWG NO. 5194		圖號		UNIT	
		REV. A		版本		inch	
		DATE DEC - 11 - 2009		日期		mm	
		CHECKED BY RICHARD		審核		SHEET 1 of 1	
		DRAWN BY IRENE		製圖		張數	