


SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 2A 12V DC / 0.5A 30V DC
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 100 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds
- Operating Voltage : 150V AC Max

MECHANICAL

- Insertion & Extraction Force :
Initial : 0.3 To 3.0 Kgs
After life test : 0.2 To 3.0 Kgs
- life test (20-30 cycle/minute) 500 cycles unloding

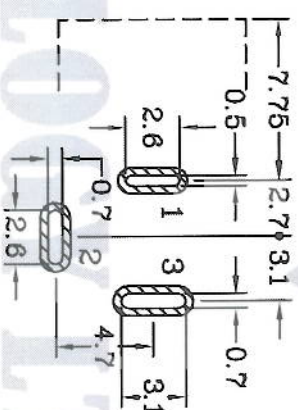

PCB LAYOUT

UNIT: mm

繪圖 DRAWN BY FUJFU	日期 DATE 2008/12/26
核對 CHECKED BY WENDY	比例 SCALE 1:1

DCPJ03-2.5

圖號 851-07
DRAWING NO.