


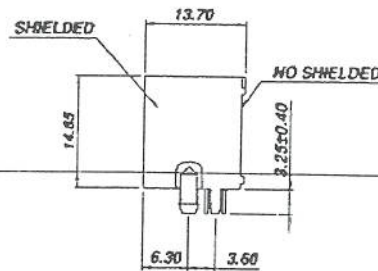


RoHS Compliant



SPECIFICATION :


1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing (Option) :
 - PBT Glass Filled (UL 94V-0), Soldering Temperature: 235°C
 - Nylon (UL 94V-0), Soldering Temperature: 165°C
- Color : Black Color
- Spring Wire:
 - 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
- Temperature Range : -40°C / +85°C
- Durability : 500 Mating cycles Min.

AJ-026SH-8-F-XX



DWG. NO.

AST026027-1

NOT SCALED DRAWING		TOLERANCE UNLESS OTHERWISE NOTICE		INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	MM INCH	LINEAR	MM INCH	.00±0.01 .002±0.005 .0080±0.002	.00±0.25 .000±0.13 .000±0.05	Steven CK'D	JUL-01 '08
		ANGLE	±0°30'	RADIAL	+0.45 -0.15	John APP'D Billy	JUL-01 '08 JUL-01 '08