



成品製造管制圖  
 DRAWING OF FINISHED PRODUCTS

禁止使用1級環境管理物質  
 Non-use Warranty for Level 1  
 Prohibited Substances in Product.

Pich 1.25mm  
 間距 (.049")

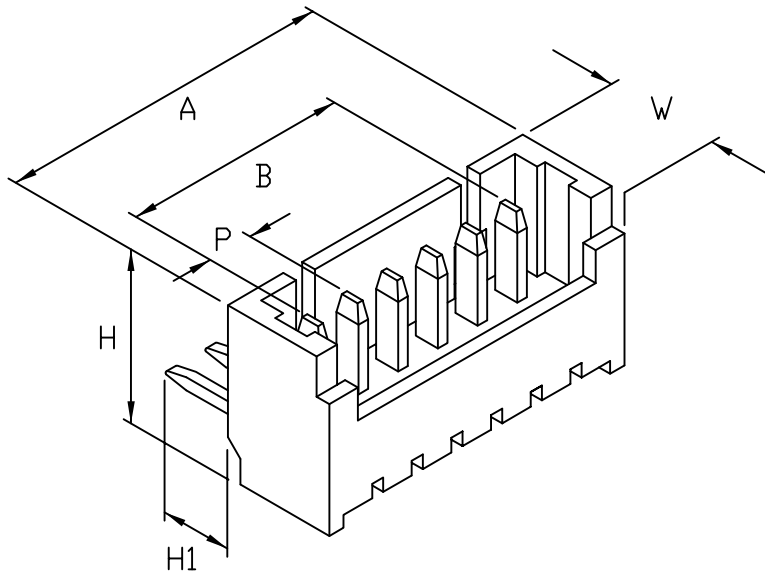

P.C.B LAYOUT

產品編號 Part No: JM24125-R(DIP)  
 品名 Product: 塑膠公座-DIP CONNECTOR-DIP  
 材質 Material: Housing: NYLON 94V-0  
 Contact Pin: Brass, Tin plated.  
 配合端子 Suitable Terminal: J24125PS  
 配合塑膠 Suitable housing: JP24125  
 額定電壓/電流 Current Rating:  
 AC/DC50V 1A(28~32AWG#)  
 絕緣阻抗 INS. Resistance: 100M Ω Min.  
 耐電壓 Withstand Voltage: 500V AC/1minute.  
 適用溫度 Operation Temp: -25°C~+85°C  
 顏色 Colour: 本色 (Natural)

DIMENSION:(MM)  
 P:1.25 ± 0.1  
 W:3.2 ± 0.2  
 H:4.7 ± 0.2  
 H1:2.3 ± 0.2

PIN	A±0.3	B±0.2
2R	4.25	1.25
3R	5.50	2.50
4R	6.75	3.75
5R	8.00	5.00
6R	9.25	6.25
7R	10.50	7.50
8R	11.75	8.75
9R	13.00	10.00
10R	14.25	11.25
11R	15.50	12.50
12R	16.75	13.75

\* 本成品圖僅供參考,若需做為承認用請聯絡就近業務員確認  
 (The drawing is for reference only,  
 please contact the sales division nearby for final confirmation if it's for approval purpose.)

H/Q: Kaohsiung, Taiwan  
 總公司: 高雄, 台灣  
 TEL: 886-7-6223787  
 FAX: 886-7-6210385  
 E-mail: jmt6317@jmt.com.tw

Taipei Branch, Taiwan  
 台北營業所  
 TEL: 886-2-26940195-7  
 FAX: 886-2-26940738  
 E-mail: taipei.jmt@msa.hinet.net

Overseas, Taiwan  
 外銷業務部  
 TEL: 886-7-6223787  
 FAX: 886-7-6210385  
 E-mail: jmt6318@yahoo.com.tw