



成品製造管制圖

DRAWING OF FINISHED PRODUCTS

Pitch 3.96mm
 間距 (.156")

禁止使用1級環境管理物質
 Non-use Warranty for Level 1
 Prohibited Substances in Product.

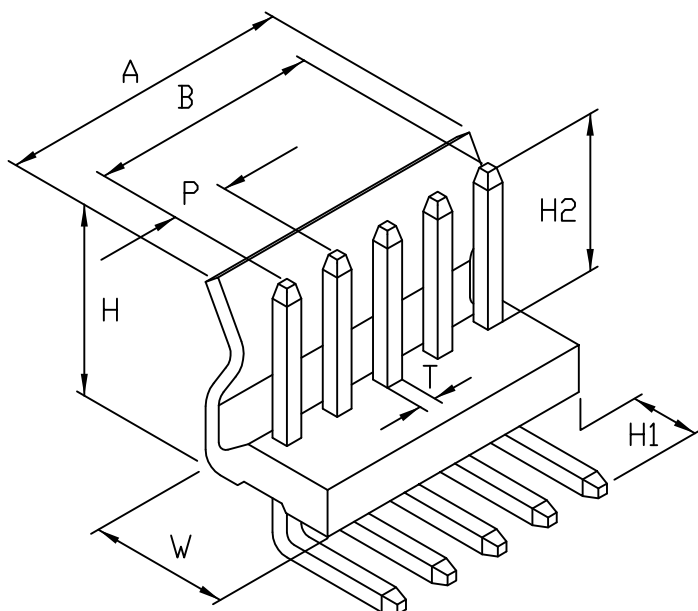

產品編號 Part No: JM2422-R

品名 Product: 塑膠公座-DIP CONNECTOR-DIP

材質 Material: Housing: NYLON 94V-2

Contact Pin: Brass, Tin plated.

配合端子 Suitable Terminal: J24221BS

配合塑膠 Suitable housing: JP2422

額定電壓/電流 Current Rating:

AC/DC250V 10A(18~24AWG#)

絕緣阻抗 INS. Resistance: 1000MΩ Min.

耐電壓 Withstand Voltage: 1000V AC/1minute.

適用溫度 Operation Temp: -25°C~+85°C

顏色 Colour: 本色 (Natural)

DIMENSION:(MM)

P: 3.96 ± 0.1

W: 9.6 ± 0.2

H: 12.6 ± 0.3

H1: 3.6 ± 0.3

H2: 11.6 ± 0.3

T: 1.14 ± 0.03

PIN	A±0.3	B±0.2
2	7.92	3.96
3	11.88	7.92
4	15.84	11.88
5	19.80	15.84
6	23.76	19.80
7	27.72	23.76
8	31.68	27.72
9	35.64	31.68
10	39.60	35.64
11	43.60	39.60
12	47.56	43.56

* 本成品圖僅供參考, 若需做為承認用請聯絡就近業務員確認

(The drawing is for reference only,

please contact the sales division nearby for final confirmation if it's for approval purpose.)

H/Q: Kaohsiung, Taiwan

總公司: 高雄, 台灣

TEL: 886-7-6223787

FAX: 886-7-6210385

E-mail: jmt6317@jmt.com.tw

Taipei Branch, Taiwan

台北營業所

TEL: 886-2-26940195-7

FAX: 886-2-26940738

E-mail: taipei.jmt@msa.hinet.net

Overseas, Taiwan

外銷業務部

TEL: 886-7-6223787

FAX: 886-7-6210385

E-mail: jmt6318@yahoo.com.tw