


DRAWING OF FINISHED PRODUCTS

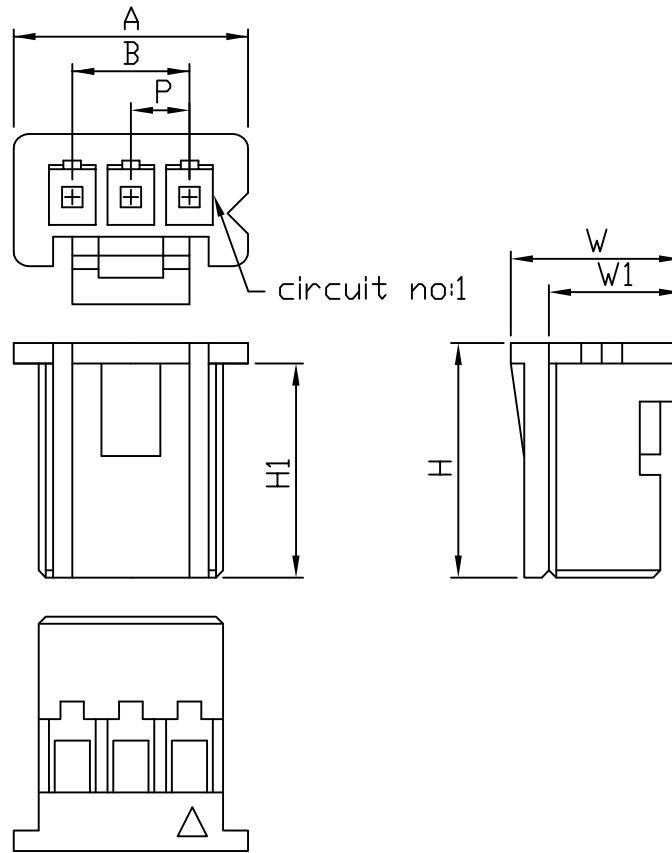

ITEM NO: JP20A-2 TO -4
 MATERIAL: NYLON66 UL94V-0
 VOLTAGE RATING: AC, DC, 250V
 CURRENT RATING: AC, DC, 3A Max
 CONTACT RESISTANCE: 20mΩ Max
 INSULATION RESISTANCE: 1.000MΩ Min.
 TEMPERATURE RANGE: -25° TO +85°
 WITHSTANDING VOLTAGE: 800V AC/Minute

	A ± 0.3	B ± 0.2
JP20A-2	6.0	2.0
JP20A-3	8.0	4.0
JP20A-4	10.0	6.0

DIMENSION: (MM)

P: 2.0 ± 0.1
 H: 8.0 ± 0.2
 H1: 7.3 ± 0.2
 W: 5.8 ± 0.2
 W1: 4.5 ± 0.2

HANDLED BY

APPROVED BY

捷仕美精工股份有限公司
 JUST MAKE TERMINAL & MACHINE CO., LTD.

總公司: 高雄市岡山區為隨里為隨西路 85 號
 電話: (07)6223787 傳真: (07)6210385
 台北營業所: 新北市汐止區福德一路 430 巷 27 號 6F
 電話: (02)26940195~7 傳真: (02)26940738