
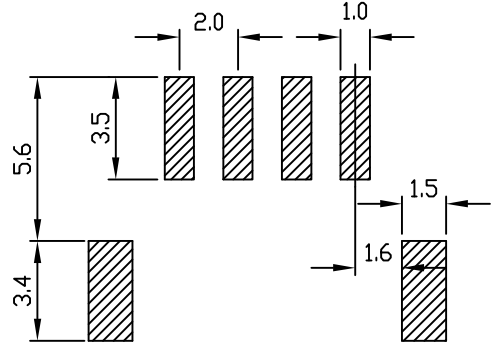



成品製造管制圖
 DRAWING OF FINISHED PRODUCTS

禁止使用1級環境管理物質
 Non-use Warranty for Level 1
 Prohibited Substances in Product.

Pich 2.0mm
 間距 (.079")

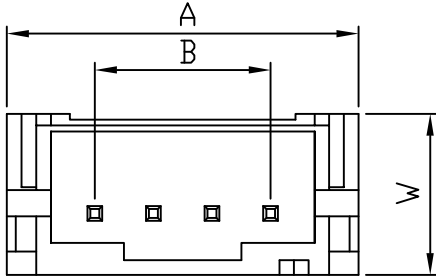

RECOMMENDED P.C.BOARD PATTERN DIM.

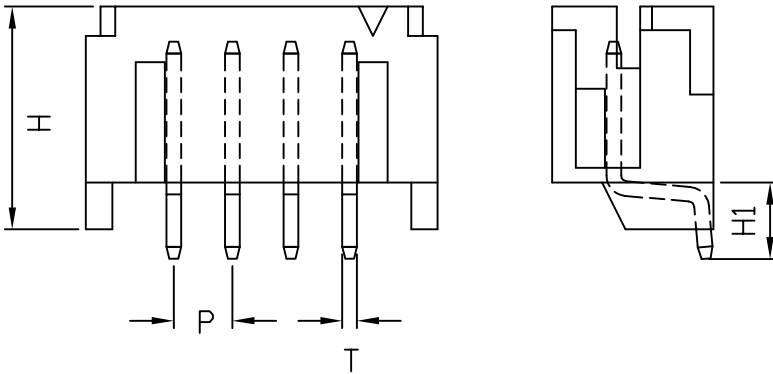

產品編號 Part No: JM24181-R(SMT)
 品名 Product: 塑膠公座-DIP CONNECTOR-DIP
 材質 Material: Housing: NYLON 94V-0
 Contact Pin: Brass, Tin plated.
 配合端子 Suitable Terminal: J24181BS/PS
 配合塑膠 Suitable housing: JP24181
 額定電壓/電流 Current Rating:
 AC/DC250V 2A(22~28AWG#)
 絕緣阻抗 INS. Resistance: 1000M Ω Min.
 耐電壓 Withstand Voltage: 800V AC/1minute.
 適用溫度 Operation Temp: -25°C~+85°C
 顏色 Colour: 本色 (Natural)

DIMENSION:(MM)
 T: □0.5 ± 0.03
 P: 2.0 ± 0.1
 H: 7.6 ± 0.2
 H1: 2.6 ± 0.3
 W: 5.5 ± 0.2

PIN	A±0.3	B±0.2
2R	8.0	2.0
3R	10.0	4.0
4R	12.0	6.0
5R	14.0	8.0
6R	16.0	10.0
7R	18.0	12.0
8R	20.0	14.0
9R	22.0	16.0
10R	24.0	18.0
11R	26.0	20.0
12R	28.0	22.0

* 本成品圖僅供參考, 若需做為承認用請聯絡就近業務員確認
 (The drawing is for reference only,
 please contact the sales division nearby for final confirmation if it's for approval purpose.)