
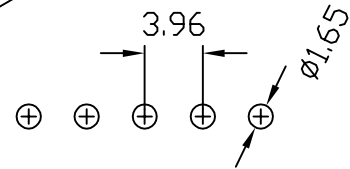


成品製造管制圖  
 DRAWING OF FINISHED PRODUCTS

禁止使用1級環境管理物質  
 Non-use Warranty for Level 1  
 Prohibited Substances in Product.

Pich 3.96mm  
 間距 (.156")

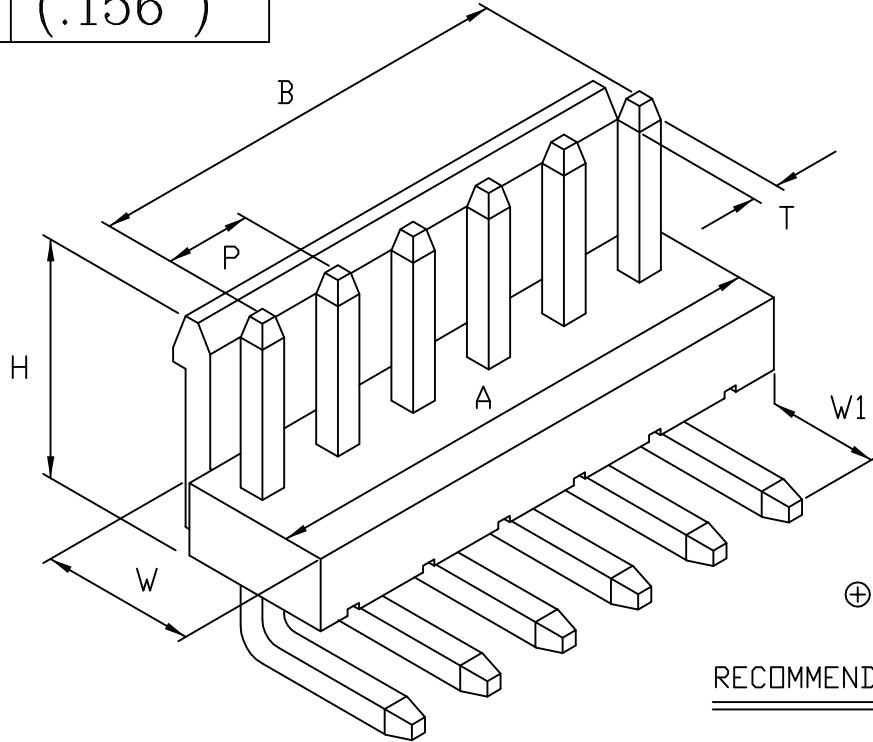

RECOMMENDED P.C.BOARD HOLE DIMM.

產品編號 Part No: JM24228-R  
 品名 Product: 塑膠公座-DIP CONNECTOR-DIP  
 材質 Material: Housing: NYLON 94V-0  
 Contact Pin: Brass, Tin plated.  
 配合端子 Suitable Terminal: J24228BS  
 配合塑膠 Suitable housing: JP24228  
 額定電壓/電流 Current Rating:  
 AC/DC250V 7A(18~22AWG#)  
 絕緣阻抗 INS. Resistance: 1000MΩ Min.  
 耐電壓 Withstand Voltage: 1500V AC/1minute.  
 適用溫度 Operation Temp: -25°C~+85°C  
 顏色 Colour: 本色 (Natural)

DIMENSION:(MM)  
 P:3.96 ± 0.1  
 W:8.1 ± 0.2  
 H:9.4 ± 0.3  
 W1:4.5 ± 0.3  
 T:□1.14 ± 0.03

PIN	A±0.3	B±0.2
2	7.86	3.96
3	11.82	7.92
4	15.78	11.88
5	19.74	15.84
6	23.70	19.80
7	27.66	23.76
8	31.62	27.72
9	35.58	31.68
10	39.54	35.64
11	43.50	39.60
12	47.46	43.56

\* 本成品圖僅供參考,若需做為承認用請聯絡就近業務員確認  
 (The drawing is for reference only,  
 please contact the sales division nearby for final confirmation if it's for approval purpose.)

H/Q: Kaohsiung, Taiwan  
 總公司: 高雄, 台灣  
 TEL: 886-7-6223787  
 FAX: 886-7-6210385  
 E-mail: jmt6317@jmt.com.tw

Taipei Branch, Taiwan  
 台北營業所  
 TEL: 886-2-26940195-7  
 FAX: 886-2-26940738  
 E-mail: taipei.jmt@msa.hinet.net

Overseas, Taiwan  
 外銷業務部  
 TEL: 886-7-6223787  
 FAX: 886-7-6210385  
 E-mail: jmt6318@yahoo.com.tw