RoHs 环保

A型

REV.	ECN NO.	REVISED	DATE

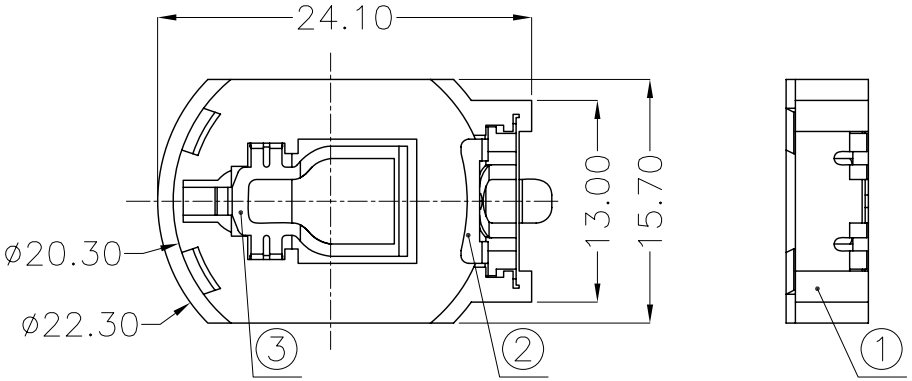

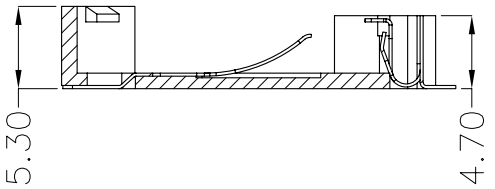

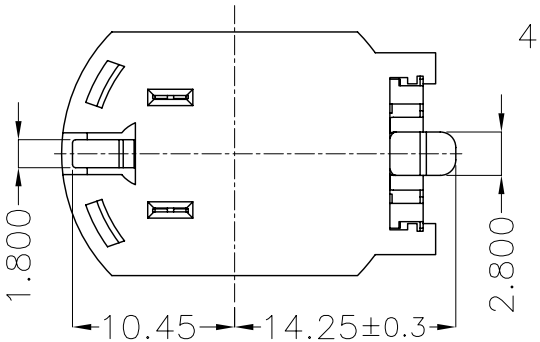

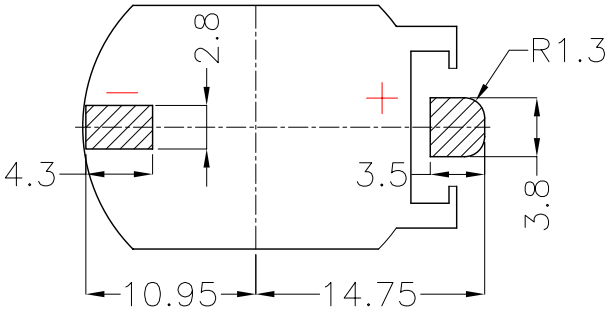

PCB Layout Diagram
Top View

NOTE:

1.MATERIAL:

a.HOUSING:PPA

b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Au1u")
SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: −25° C~ +85° C

ORDERING INFORMATION

BS-08-B***001

- 電池座系列
- BS-08系列
- SMT 180° TYPE
- PLATING:
  A-Au1U"
  J-Ni100U"~120U"
  K-Sn100U"~120U"
- MATERIAL:
  1A-PBT BLACK
  1B-PA66 BLACK
  2A-PPA BROWN
  2B-PPA BLACK
  3A-PPS BROWN
  3B-PPS BLACK
  4A-LCP WHITE
  4B-LCP BLACK

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(−)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.30, X.X :±0.25, X.XX :±0.20, X.XXX :±0.10

ANGLES: X :±1°, X.X :±0.5°

WEIGHT: 0.86g

SHEET 1 OF 1

DSND	YangFeng	DATE	2017-06-28	TITLE: BS-2032-8 SMT
CHKD	ZhouRuicai	DATE	2017-06-28	
APVD	XueShunyong	DATE	2017-06-28	PART NO.: BS-08-B2AA001
SCALE: 2:1	SIZE: A4	VIEW:		
UNIT: mm	REV.: A/0	OBJECT: MY		DRAW NO.:MY-CP-0007