
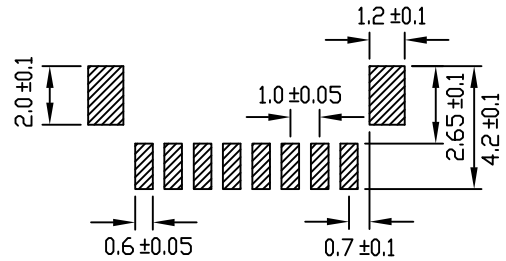


成品製造管制圖  
 DRAWING OF FINISHED PRODUCTS

禁止使用1級環境管理物質  
 Non-use Warranty for Level 1  
 Prohibited Substances in Product.

Pich 1.0mm  
 間距 (.039")

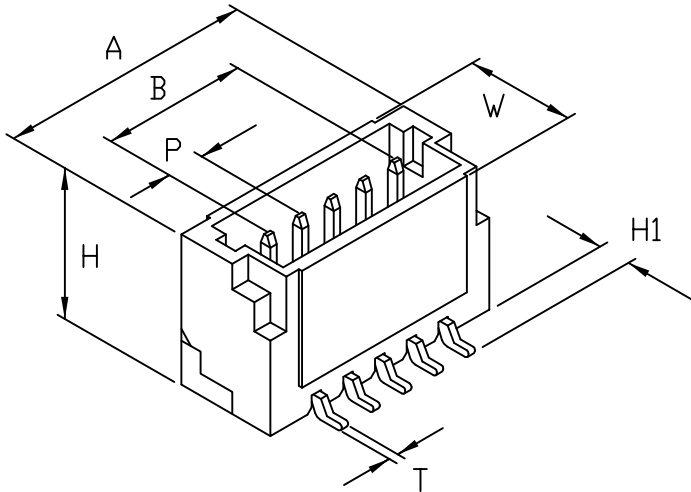

RECOMMENDED P.C.BOARD PATTERN DIM.

產品編號 Part No: JM1000-(SMT)  
 品名 Product: 塑膠公座-SMT CONNECTOR-SMT  
 材質 Material: Housing: NYLON 94V-0  
 Contact Pin: Brass, Tin plated.  
 配合端子 Suitable Terminal: J1000PS  
 配合塑膠 Suitable housing: JP1000  
 額定電壓/電流 Current Rating:  
 AC/DC50V 1A(28~32AWG#)  
 絕緣阻抗 INS. Resistance: 100M Ω Min.  
 耐電壓 Withstand Voltage: 500V AC/1minute.  
 適用溫度 Operation Temp: -25°C~+85°C  
 顏色 Colour: 本色 (Natural)

DIMENSION:(MM)	PIN	A±0.3	B±0.2
P:1.0 ± 0.05	2	4.0	1.0
W:2.9 ± 0.1	3	5.0	2.0
H:4.25 ± 0.2	4	6.0	3.0
H1:0.7 ± 0.2	5	7.0	4.0
T: □ 0.2 ± 0.03	6	8.0	5.0
	7	9.0	6.0
	8	10.0	7.0
	9	11.0	8.0
	10	12.0	9.0
	11	13.0	10.0
	12	14.0	11.0

\* 本成品圖僅供參考,若需做為承認用請聯絡就近業務員確認  
 (The drawing is for reference only,  
 please contact the sales division nearby for final confirmation if it's for approval purpose.)

H/Q: Kaohsiung, Taiwan  
 總公司: 高雄, 台灣  
 TEL: 886-7-6223787  
 FAX: 886-7-6210385  
 E-mail: jmt6317@jmt.com.tw

Taipei Branch, Taiwan  
 台北營業所  
 TEL: 886-2-26940195-7  
 FAX: 886-2-26940738  
 E-mail: taipei.jmt@msa.hinet.net

Overseas, Taiwan  
 外銷業務部  
 TEL: 886-7-6223787  
 FAX: 886-7-6210385  
 E-mail: jmt6318@yahoo.com.tw